

ELECTRICAL	
Wattage	15W
Voltage	120V
Current	120mA
Power Factor	0.9
Total Harmonic Distortion (THD)	<25
LIGHTING PERFORMANCE	
Lumens	1000
Lumens Per Watt (Lm/W)	67
Color Temperature (CCT)	5000K
Color Rendering (CRI)	95
Beam Angle	95°
Light Distribution	Type VS

90928

LED 5"/6" RETROFIT CAN

INDOOR FIXTURE


LIFESPAN	
Average Life (Hours)	50,000
Warranty (Years)	5
COMPONENTS	
LED Light Source	Hongli 2835FVW
CONSTRUCTION	
Housing	Aluminum / PC
Base / Power Supply	E26 - Medium
Finish	White
PACKAGING	
Master Carton	12pc / 10811768027034
Individual Box	811768027037
Country of Origin	China
HS Tariff	9405.40.8200
DIMENSIONS	
Dimensions (Inches)	2.4"(L) x 7.7"(DIA)

PRODUCT DETAILS

Dimmable

ENVIRONMENT	DAMP
-------------	------

Operating Temperature -20°C ~ 45°C

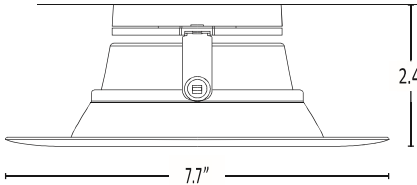

Dimmable Lighting Control

Suitable Location Indoor / Covered Ceilings

Ingress Protection Rating IP43

CERTIFICATIONS	
----------------	--



ORDERING

ITEM#	DESCRIPTION	CASE
90928	LED RETROFIT 5"/6" CAN 15W/50K/90CRI/WHITE TRIM/MED/DIMMABLE - SUPERIOR LIFE® ENERGY STAR®	12

ACCESSORIES

90905-QC	CONNECTOR FOR GU24 BASE ON 4" AND 5/6" LED RETROFIT CAN	1
----------	---	---

Please check Energy Star website for the most current list of approved items • www.energystar.gov Published lumens on LED products are approximate and may vary slightly.

